
ROTISSERIE GRANDFLAME GAS
REF: GF975.3G.LUX or GF975.3G.SS





GF975.3G.LUX
+ 975SCL

Non-contractual photo

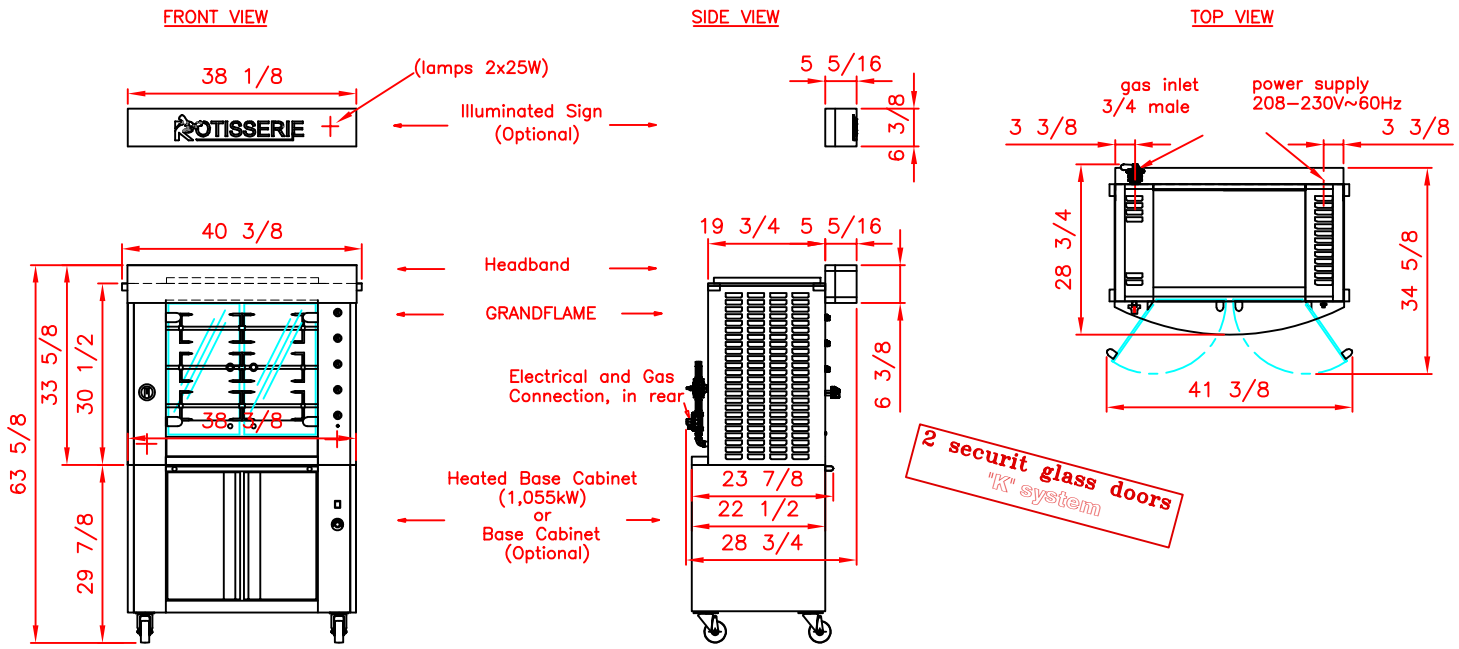

GF975.3G.SS
+ 975SRS

Non-contractual photo

"K.GLASS" protection

Manufacturing:

The "K.GLASS" is a layer product manufactured on line, at high temperature, at oven output, where there fines metal particles are spread by pyrolysis on float clear surface, forming in that way an integrated layer to the door surface part.This layer is made with precious metals which give to the glass door quality of very low emissions, then a high resistance to the thermal radiance.

SPECIFICATIONS

Weight: 155 Lbs, Weight packed without base cabinet: 285 Lbs
Weight packed with base cabinet: 530 Lbs
Capacity: 6/9 chickens, 3 ajustable spits
Black enamel and brass fittings for rotisserie ref: GF975.3G.LUX (luxury)
All stainless steel for rotisserie ref: GF975.3G.SS (stainless steel)
With protective glass doors K'Glass
Power supply: 1 phase+ground (208-230V~60Hz), 1,15 Amps. Wire length: 6'.
Electrical power 0,24 kW made up of:
_3 motors of 40W, 1 halogen lamp of 150W, 2 lamps of 25w for illuminated sign.
Natural gas power: 27500 BTU/h
OPTIONS: specific colours, Storage base ref: 975SRS or 975SRL, heated with doors ref: 975 SCS or 975 SCL (1.055 kW to be added to the electrical power of the rotisserie), heating with drawers ref: 975SBCS or 975SBCL (1.055 kW to be added to the Lumineuse sign ref: 975BANRI or 975BANRE, gas connection hose, grease sensor ref: 975CAPTS or 975CAPTL,
cooking timer with alarm.
OPTIONS, ACCESSOIRIES: spits, vertical spit system, prongs, spit mover, gas lighter, grills, trays.

All this information are the property of Rotisol. Reproduction partial or in totality are prohibited without authority prior written of compagny Rotisol.

Scale: 1/33

Rotisol

October 2024