

ROTISSERIE GRANDFLAME GAS
REF: GF1375.5G.LUX or GF1375.5G.SS



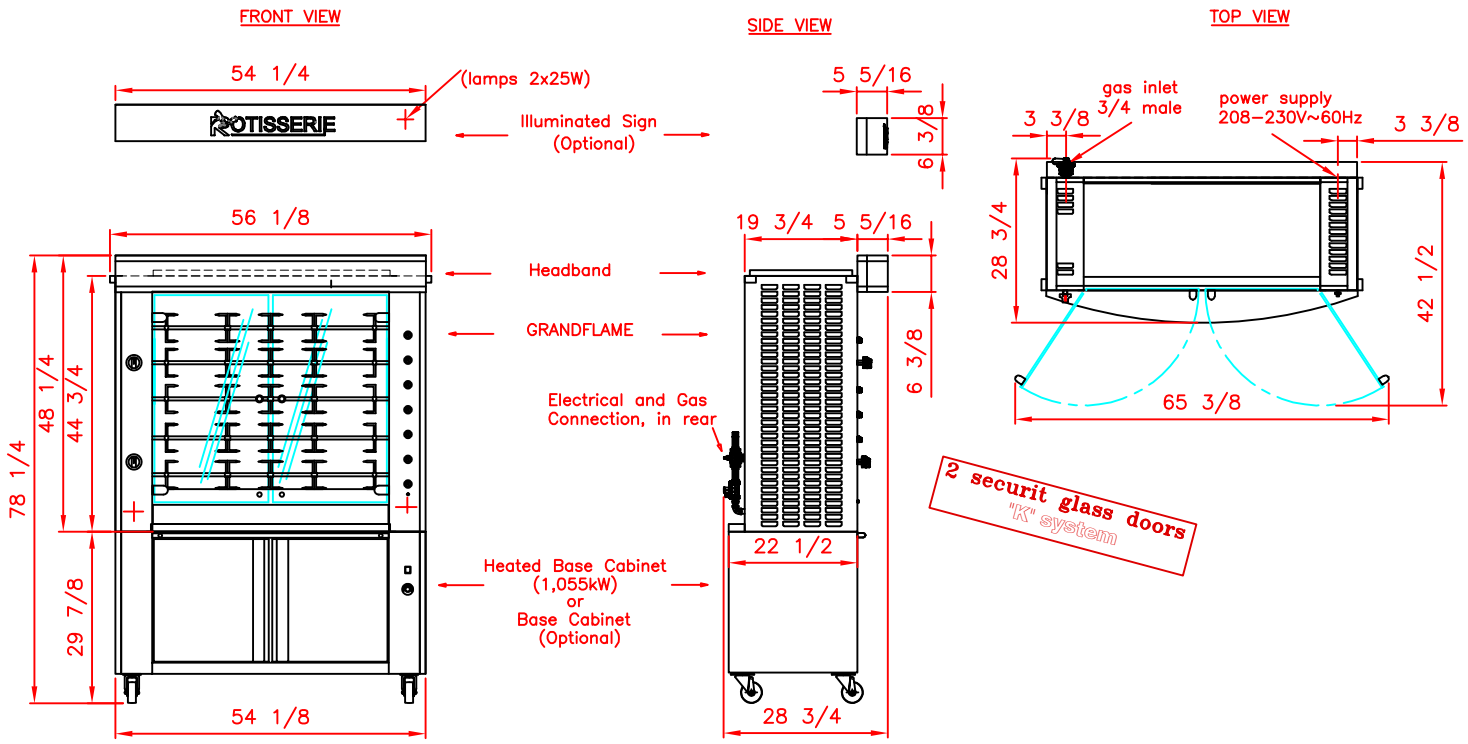

Non-contractual photo

GF1375.5G.LUX
+ 1375SRL

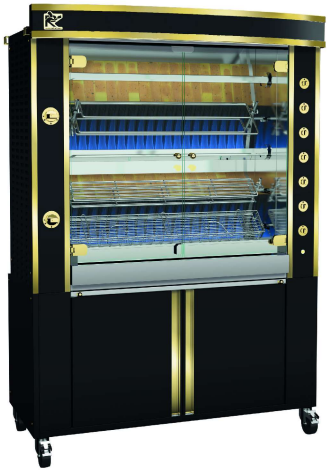

GF1375.5G.SS
+ 1375SRS

Non-contractual photo

"K.GLASS" protection

Manufacturing:

The "K.GLASS" is a layer product manufactured on line, at high temperature, at oven output, where there fines metal particles are spread by pyrolysis on float clear surface, forming in that way an integrated layer to the door surface part.This layer is made with precious metals which give to the glass door quality of very low emissions, then a high resistance to the thermal radiance.

SPECIFICATIONS

Weight: 420 Lbs, Weight packed without base cabinet: 550 Lbs,
Weight packed with base cabinet : 770 Lbs
Capacity: 25/30 chickens, 5 ajustable spits
Black enamel and brass fittings for rotisserie ref: GF1375.5G.LUX (luxury)
All stainless steel for rotisserie ref: GF1375.5G.SS (stainless steel)
With protective glass doors K'Glass
Power supply: 1 phase + ground (208-230V~60Hz), 2,16 Amps. Wire length: 6'.
Electrical power 0,55 kW made up of:
_5 motors of 40W, 2 halogen lamp of 150W, 2 lamps of 25w for illuminated sign.
Natural gas power: 82000 BTU/h
OPTIONS: specific colours, Storage base ref: 1375SRS or 1375SRL, heated with doors ref: 1375 SCS or 1375 SCL (2.055 kW to be added to the electrical power of the rotisserie), heating with drawers ref: 1375SBCS or 1375SBCL (2.055 kW to be added to the Lumineuse sign ref: 1375BANRI or 1375BANRE, gas connection hose, grease sensor ref: 1375CAPTS or 1375CAPTL,
cooking timer with alarm.
OPTIONS, ACCESSOIRIES: spits, vertical spit system, prongs, spit mover, gas lighter, grills, trays.

All this information are the property of Rotisol. Reproduction partial or in totality are prohibited without authority prior written of compagny Rotisol.

Scale: 1/33

Rotisol

October 2024