
ROTISSERIE GRANDFLAME GAS
REF: GF975.8G.SS or 975.8G.LUX



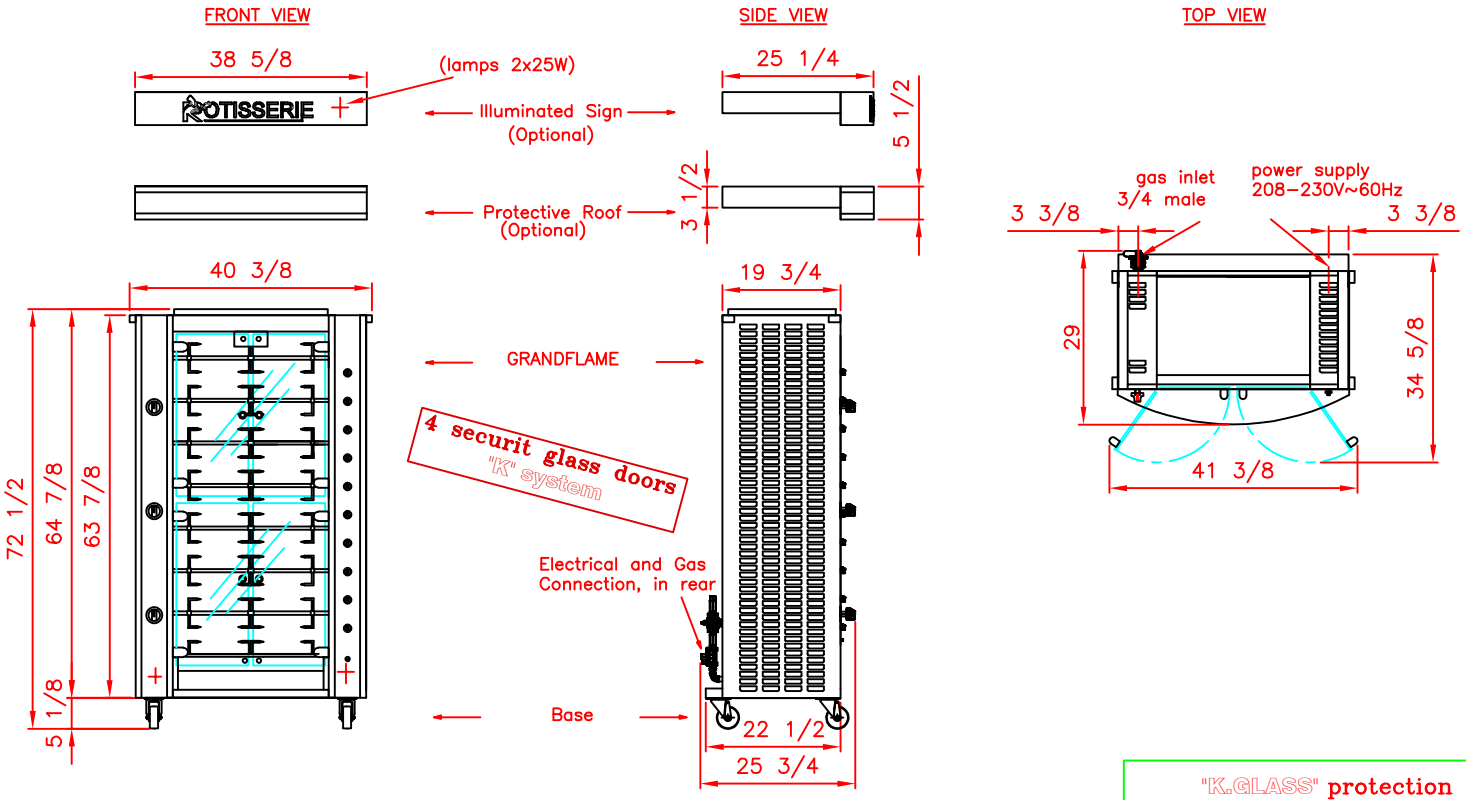

GF1375.8G.LUX

Non-contractual photo

"K.GLASS" protection

Manufacturing:



The "K.GLASS" is a layer product manufactured on line, at high temperature, at oven output, where there fines metal particles are spread by pyrolysis on float clear surface, forming in that way an integrated layer to the door surface part.This layer is made with precious metals which give to the glass door quality of very low emissions, then a high resistance to the thermal radiance.

SPECIFICATIONS

Weight: 430 Lbs, Weight packed with base on casters or base elevated on casters: 520 Lbs, Weight packed with base cabinet for unspitting: 585 Lbs
Capacity: 16/24 chickens, 8 ajustable spits
Full body porcelain enamel with brass or chrome for rotisserie ref: GF975.8G.LUX
All stainless steel with brass or chrome rotisserie ref: GF975.8G.SS
with protective glass doors K'Glass, base ref: 975SR
Power supply: 1 phase+neutral+earth (208-230V~60Hz), 1,88 Amps. Wire length: 6'.
Electrical power 0,39 kW made up of:
_8 motors of 50W, 1 halogen lamp of 150W, 2 lamps of 25w for illuminated sign.
Natural gas power: 82000 BTU/h
OPTIONS: spécific colors,
Illuminated sign ref: 975BANRI or 975BANRE, Protective
roof ref: 975BANI, 975BANiL or 975BANL, gas connection, sensor grease ref: 975CAPTS or ref: 975CAPTL, cooking timer with alarm.
OPTIONS, ACCESSOIRIES: spits, vertical spit system, prongs, spit mover, gas lighter, grills, trays.

All this information are the property of Rotisol. Reproduction partial or in totality are prohibited without authority prior written of compagny Rotisol.

Scale: 1/33

Rotisol

March 2026