ROTISSERIE GRANDFLAME GAS
REF: GF1375.8G.LUX or GF1375.8G.SS

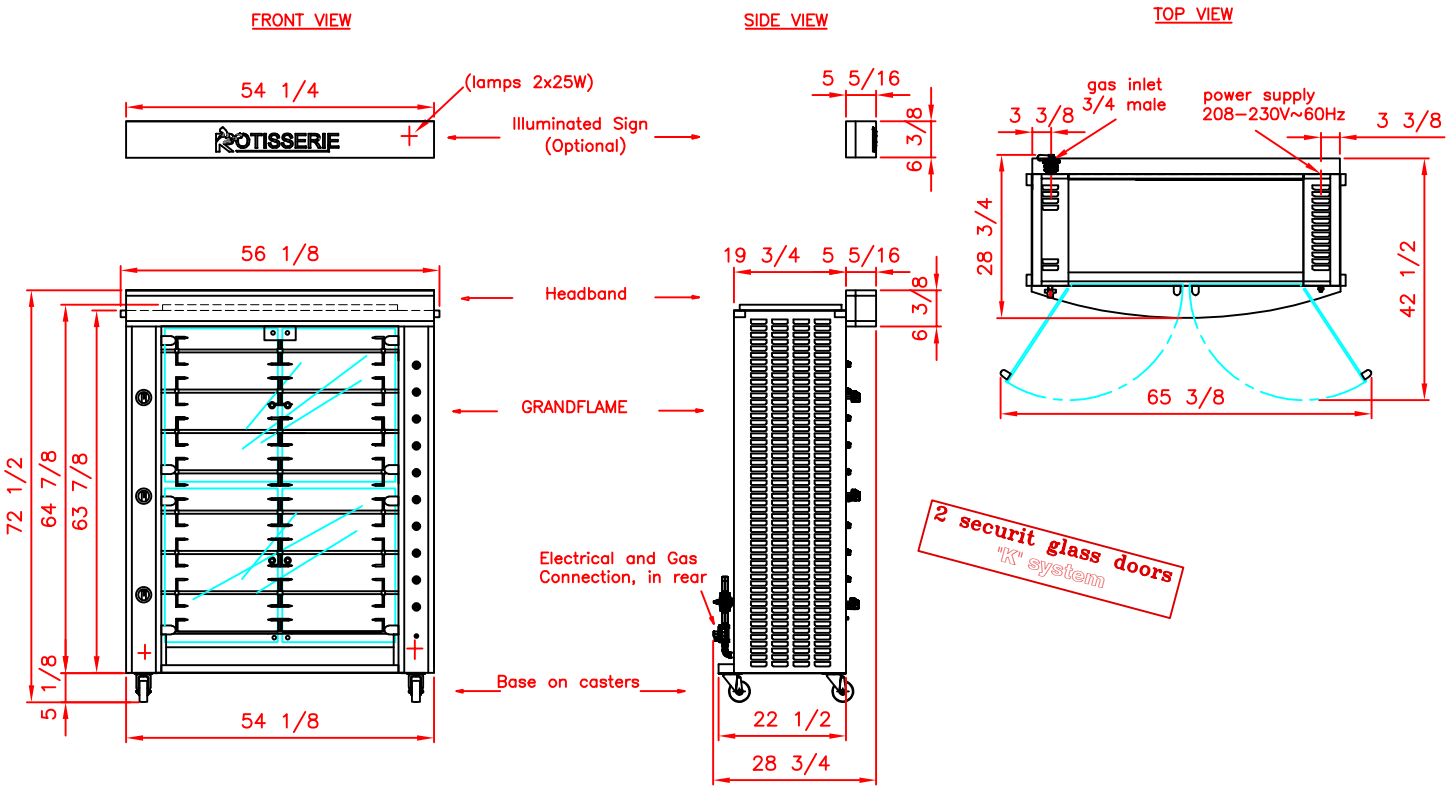



GF1375.8G.LUX

Non-contractual photo



GF1375.8G.SS

Non-contractual photo

"K.GLASS" protection

Manufacturing:

The "K.GLASS" is a layer product manufactured on line, at high temperature, at oven output, where there fines metal particles are spread by pyrolysis on float clear surface, forming in that way an integrated layer to the door surface part.This layer is made with precious metals which give to the glass door quality of very low emissions, then a high resistance to the thermal radiance.

SPECIFICATIONS

Weight: 660 Lbs, Packed weight with Base on casters.
Capacity: 40/48 chickens, 8 ajustable spits
Black enamel and brass fittings for rotisserie ref: GF1375.8G.LUX (luxury)
All stainless steel for rotisserie ref: GF1375.8G.SS (stainless steel)
Caster base ref: 1375SR
With protective glass doors K'Glass
Power supply: 1 phase + ground (208-230V~60Hz), 1,88 Amps. Wire length: 6'.
Electrical power 0,64 kW made up of:
_8 motors of 40W, 1 halogen lamp of 150W, 2 lamps of 25w for illuminated sign.
Natural gas power: 123000 BTU/h

OPTIONS: specific colours, Luminous sign ref: 1375BANRI or 1375BANRE, protective roof ref: 1375BANI or 1375BANL, gas connection hose, grease sensor ref: 1375 CAPTS or 1375 CAPTL, cooking timer with alarm.
OPTIONS, ACCESSOIRIES: spits, vertical spit system, prongs, spit mover, gas lighter, grills, trays.

All this information are the property of Rotisol. Reproduction partial or in totality are prohibited without authority prior written of compagny Rotisol.

Scale: 1/33

Rotisol

November 2026